



Leather



23L bone

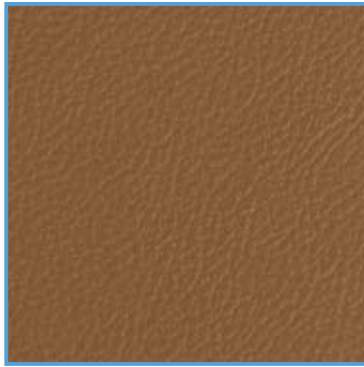

53L nutmeg

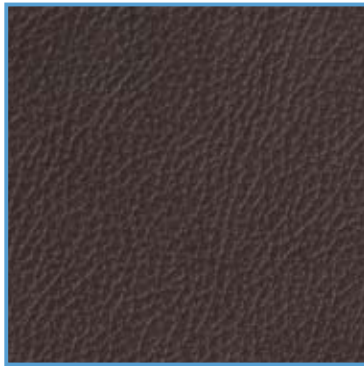

63L chocolate



83L black


Vinyl




20V bone



50V nutmeg

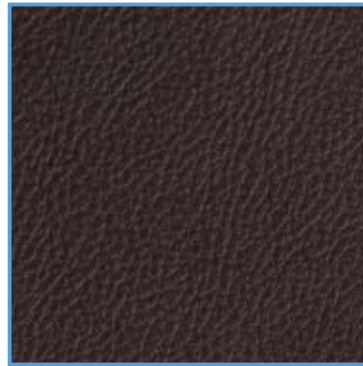

60V chocolate

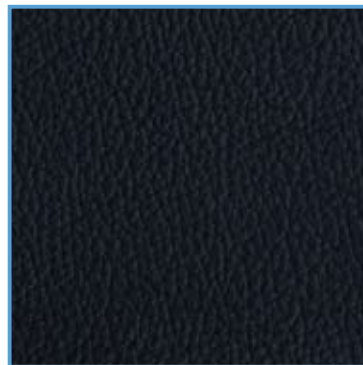

80V black

NOTE: Appearance of colors and/or finishes shown will be dependent upon your monitor and your printer. Prior to ordering, we recommend you request an actual sample card of the material(s).

fabric specifications

Leather

color	23L bone 53L nutmeg
thickness	0.8 - 1.0mm
content	cow hide
performance	
breaking strength ISO-3376	≥ 10 N/mm2
tearing strength ISO-3377-1	30-40N
flexing resistance ISO-5402	50,000 min. flex
colorfastness to crocking ISO-11640	wet 4-5, dry 4-5
colorfastness to light ISO-105B 02	class 4-5 at 72hrs

Leather

color	63L chocolate 83L black
thickness	0.9mm
content	cow hide
performance	
flexing resistance	20.000 IUP/20
colorfastness to crocking	wet 100IUF 450 dry 500IUF 450

Vinyl

color	20V bone 50V nutmeg
width	54"
content	100% PVC
backing	polyethylene terephthalate, polypropylene
performance	
breaking strength CFFA-17	warp 100, fill 100
tearing strength CFFA-16c	warp 38, fill 39
adhesion of coating CFFA-3	warp 5, fill 5
colorfastness to crocking CFFA-7	no color transfer
flexing resistance W-Flex 25,000 cycles	passes
block resistance CFFA-4	no.1

Vinyl

color	60V chocolate 80V black
width	54"
content	100% PVC
backing	polypropylene, polyester
performance	
tearing strength	passes
NAFM standards	
colorfastness to crocking	passes
NAFM standards	
flexing resistance	passes
W-Flex 25,000 cycles	
abrasion test	passes
NAFM standards	
california bulletin 117	passes

*Actual dye lots may vary slightly.
Due to the natural characteristics of leather, scratches and marks may appear on the surface.
This appearance is the character of natural leather.

NOTE: Appearance of colors and/or finishes shown, will be dependent upon your monitor and your printer. Prior to ordering, we recommend you request an actual sample card of the material(s).