panel fabric | grade one

tayco®

tayco®

ballo

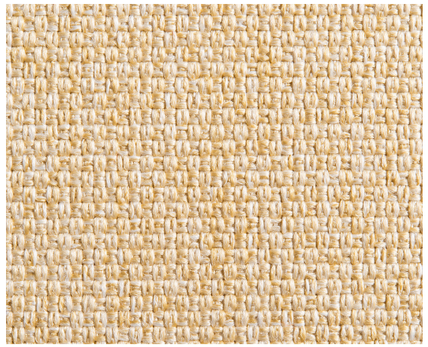
sand F5181


oceanic F6131

aurora F6121


dusk F6171


seaside F5191

pebble F5171


sunset F6141


moss F6111

stone F6151

nightfall F6161

zapote

garter F4141


lace F4181


stockinette F4151

intarsia F4171


cable F4161

crevasse

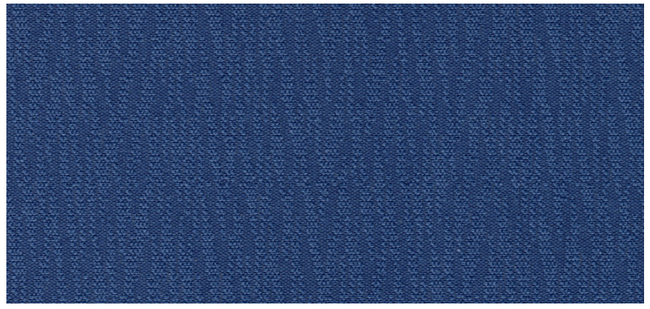
crown blue F3191

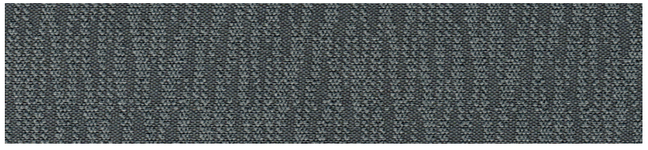
neutral grey F3201

chamonix F3181

commerce

slate F2141

sand F2151


grey F2161

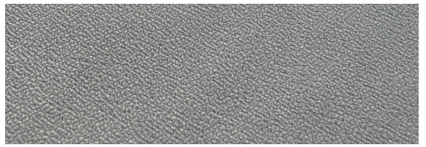
steam F2201


kiwi F2221


steel grey F2171


citrus F2231


fjord F2181

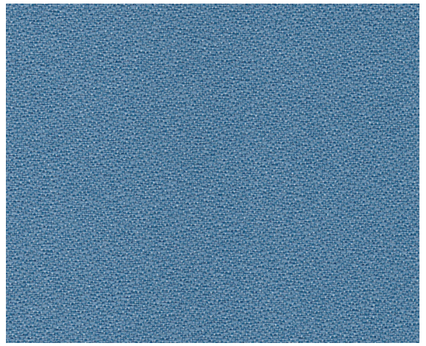
cyan blue F2211

reticolo

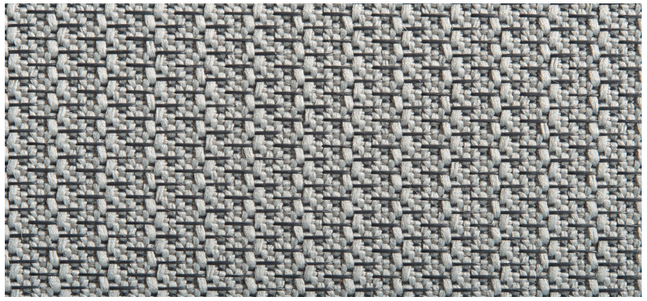
grain F4111


seed F4121


amaranth F4131

flexi


agate F5151

brookite F5111


emerald F5131

moonstone F5161


sapphire F5141

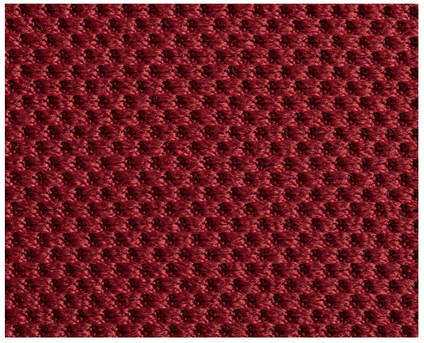
ruby F5121

tayco®

fabric specifications

pattern	content	width	weight	breaking strength	colorfastness to light	flammability
flexi	100% polyester	67" usable	16.87 ± 1.0 oz./lin. yd.	N/A	AATCC 16E Class 4.5 at 40 hours min	ASTM E-84 Class 1 or A Passes
ballo	100% polyester	67" usable	20 ± 1.0 oz./lin. yd.	230.8 lbs min. warp, 175.1 lbs. min. fill	AATCC 16E Class 4 at 40 hours min	ASTM E-84 Class 1 or A Passes
zapote	100% polyester	67" usable	12.3 ± 1.0 oz./lin. yd.	274.7 lbs. min. warp, 251.7 lbs. min. fill	AATCC 16E Class 4 at 40 hours min	ASTM E-84 Class 1 or A Passes
reticolo	100% polyester	67" usable	12.8 ± 1.0 oz./lin. yd.	246.5 lbs. min. warp, 348.7 lbs. min. fill	AATCC 16E Class 4 at 40 hours min.	ASTM E-84 Class 1 or A Passes
commerce	100% polyester	66" usable	12.0 ± 1.0 oz./lin. yd.	250 lbs. min. warp, 300 lbs. min. fill	AATCC 16E Class 5 at 40 hours min.	ASTM E-84 Class 1 or A Passes
crevasse	100% polyster	66" usable	12.0 ± 1.0 oz./lin. yd.	250 lbs. min. warp, 300 lbs. min. fill	AATCC 16E Class 5 at 40 hours min.	ASTM E-84 Class 1 or A Passes

NOTE: Dye lots may vary slightly from samples shown

400 Norris Glen Road
Toronto, ON Canada M9C 1H5
1-800-675-4092
tayco.com

08/21