





panel fabric | grade one

panel fabric | grade one


ballo

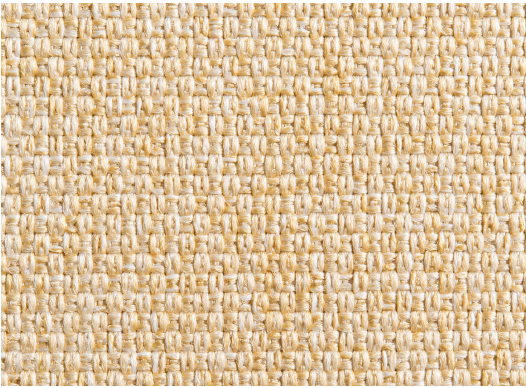


sand F5181*




oceanic F6131*




aurora F6121*




dusk F6171*



seaside F5191

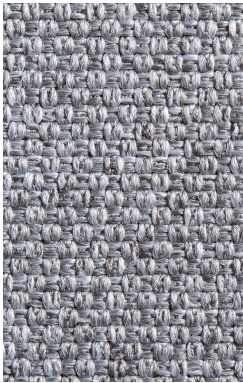


stone F6151

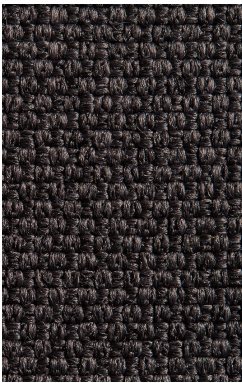


nightfall F6161



pebble F5171



sunset F6141*



moss F6111*


zapote




garter F4141




lace F4181



stockinette F4151




intarsia F4171




cable F4161

crevasse

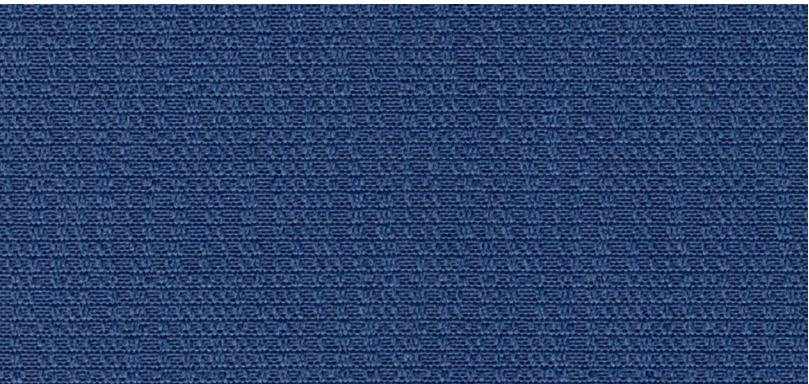

crown blue F3191

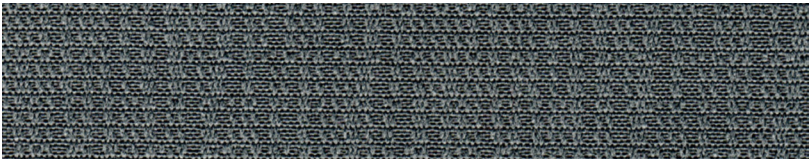

neutral grey F3201




chamonix F3181


commerce




slate F2141



sand F2151 DISCONTINUED




grey F2161

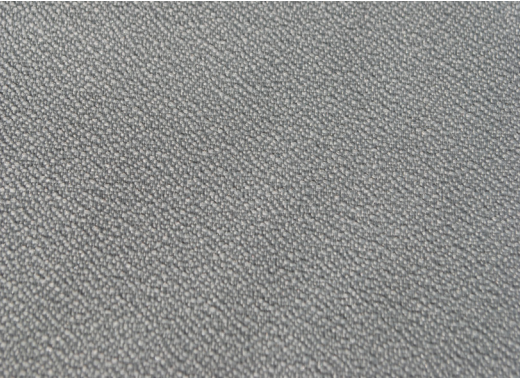


steam F2201




kiwi F2221 DISCONTINUED

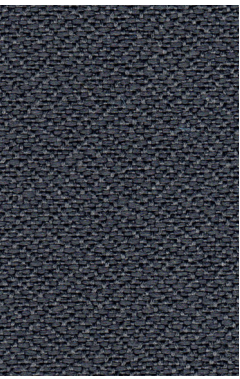


steel grey F2171

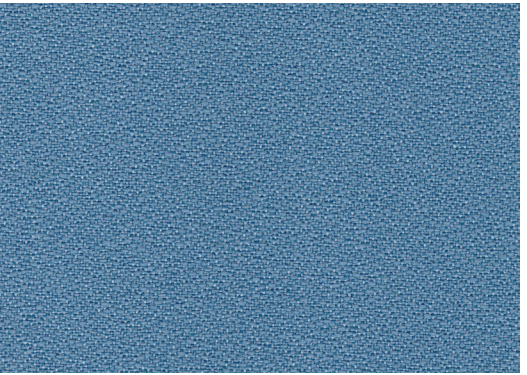

cyan blue F2211



citrus F2231 DISCONTINUED




fjord F2181


reticolo



amaranth F4131 DISCONTINUED

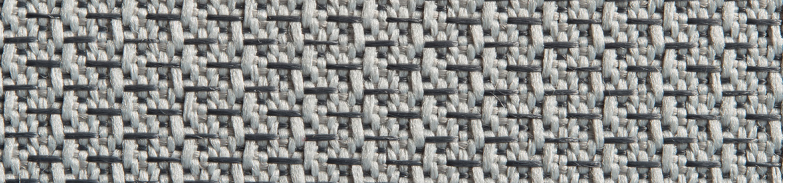

grain F4111

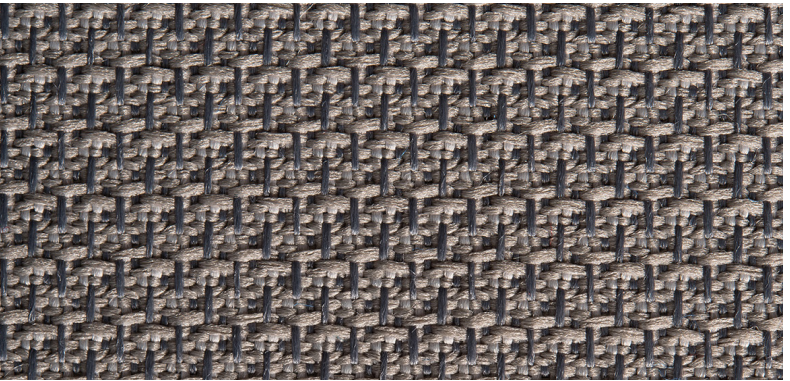

seed F4121

*Available with extended lead times and subject to case-by-case evaluation.

panel fabric specifications | grade one

						
pattern	content	width	weight	breaking strength ASTM D5034	colorfastness to light AATCC 16E	flammability ASTM E-84
ballo	100% polyester	67" usable	19.5 ± 1.0 oz./lin. yd.	230.8 lbf.min. warp, 300 lbf. min. fill	class 4.5 at 40 hours min	class 1 or A passes
zapote	100% polyester	67" usable	19.5 ± 1.0 oz./lin. yd.	250 lbf. min. warp, 300 lbf. min. fill	class 5 at 40 hours min	class 1 or A passes
crevasse	100% polyester	66" usable	12.0 ± 1.0 oz./lin. yd.	250 lbf. min. warp, 300 lbf. min. fill	class 5 at 40 hours min	class 1 or A passes
commerce	100% polyester	66" usable	12.0 ± 1.0 oz./lin. yd.	250 lbf. min. warp, 300 lbf. min. fill	class 5 at 40 hours min	class 1 or A passes
reticolo	100% polyester	67" usable	12.0 ± 1.0 oz./lin. yd.	250 lbf. min. warp, 300 lbf. min. fill	class 5 at 40 hours min	class 1 or A passes